

**RM****Costruzioni Elettroniche**

di Marchioni Davide & Daniele s.n.c.

Via IV Novembre 215/5

Casella postale N° 33

40045 Ponte della Venturina (BO) ITALY

Tel +39 0534 60460

Fax +39 0534 60463



E-MAIL ufftec@rmitaly.com

http://www.rmitaly.com

Mod. MIX 144 antenna splitter

Schematic diagram

Version 2.00

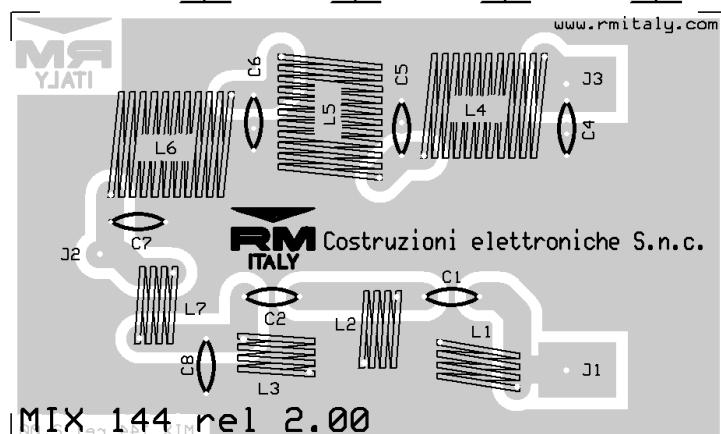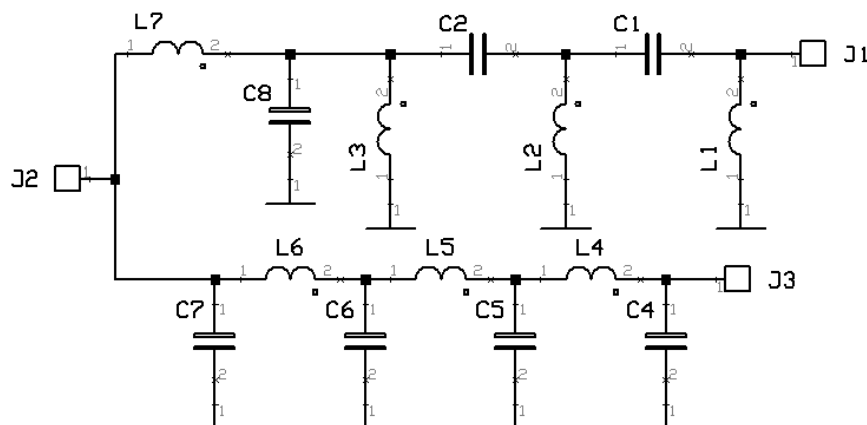

List of components

C 1	= 12 pF	500 V	NP0
C 2	= 10 pF	500 V	NP0
C 4	= 33 pF	50 V	NP0
C 5	= 82 pF	50 V	NP0
C 6	= 47 pF	50 V	NP0
C 7	= 10 pF	500 V	NP0
C 8	= 22 pF	500 V	NP0
L 1	= ANRA 309/2		
L 2	= 3 turn wire $\varnothing$ 0.8 mm on $\varnothing$ 5 mm		
L 3	= 3 turn wire $\varnothing$ 0.8 mm on $\varnothing$ 5 mm		
L 4	= 4 turn wire $\varnothing$ 0.8 mm on $\varnothing$ 8 mm		
L 5	= 4 turn wire $\varnothing$ 0.8 mm on $\varnothing$ 8 mm		
L 6	= 4 turn wire $\varnothing$ 0.8 mm on $\varnothing$ 8 mm		
L 7	= 3 turn wire $\varnothing$ 0.8 mm on $\varnothing$ 5 mm		